




Sunny -150dBc Low PIM 50 Ohm 25W Dummy Load

Model :N(M)-50-25-150

Highlight

- Small in size, light in weight
- Low PIM, -150dBc@2x37dBm

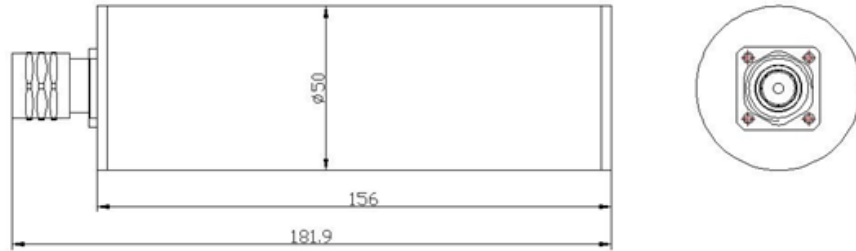

Model	N(M)-50-25-150
Frequency Range	698-2700MHz
Impedance (Ω)	50
VSWR	≤ 1.25
Average Power (W)	25
IM3 (dBc)	$\leq -150@2x37dBm$
Connector	N(M)
Ambient Temperature ($^{\circ}C$)	-30 ~ +65
Environment	Indoor
Color	Black
Dimension (mm)	156x \varnothing 50*

*Not included connector

Technical data are subjected to change without notice – File : N(M)-50-25-150 2018V1.0