




SUNNY -160dBc Low PIM 3dB Directional Coupler For 698-2700MHz, 200W, N(F)

Model: SUN-DC-627-200-3-NF-160

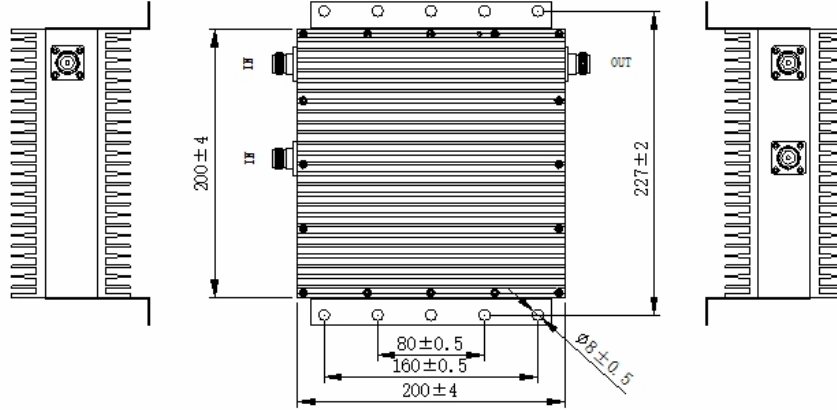

Model	SUN-DC-627-200-3-NF-160
Frequency	698-2700MHz
Coupling (dB)	3
Insertion Loss (dB)	≤0.5
Isolation (dB)	≥23
VSWR	≤1.25
IM3 (dBc@2x43dBm)	≤-160
Average Power (W)	200
Impedance (Ω)	50
RF Connector	N(F)
Operating Temperature (°C)	-35 ~ +65
Relative Humidity (%)	5 ~ 95
Application	Outdoor IP65
Color	Black
Dimension WxL* (mm)	200x200
Weight(kg)	TBAL

* Excluded connectors

Technical data are subjected to change without notice – File : SUN-DC-627-200-3-NF-160 datasheet 2020V1.0