



# Sunny, Fixed Attenuator, DC-4GHz, 50 Ohm, 5-200W, 3-30dB, 4.3-10 Type

## Model : SUN-FA-XX-YY-4310

Where

XX : Power Rating (5, 10, 25, 50, 100, 200W)

YY : Attenuation Value (3-6, 8, 10, 15, 20, 30, etc)


## Product Specification

	5W	10W	25W	50W	100W	200W
Frequency	DC-4GHz					
Attenuation (dB) <sup>1</sup>	3-6, 8, 10, 15, 20, 30					
Power (W)	5	10	25	50	100	200
Accuracy (dB)	3~6 dB	±0.6				
	8 dB	/	±0.8			/
	10 dB	±1.0				
	15 dB	/	±1.0			/
	20 dB	±1.0	±1.2			±1.0
	30 dB	±1.5				
VSWR	≤1.25					
Impedance	50					
Connector (Ω)	4.3-10(M) - 4.3-10(F)					
Ambient Temperature (°C)	-40~+80	-35~+65	-30~+65	-55~+125	-45~+85	
Environment	Indoor/Outdoor <sup>3</sup>					
Color	Black/Silver			Black		
Dimension <sup>2</sup> (mm)	Φ28×36	Φ35×36	Φ45×75	Φ60×95	Φ70×120	200×142×64
Weight (kg)	0.13	0.15	0.25	0.6	0.85	2.6

<sup>1</sup> Attenuation Value can be pre-selected from 3-30dB

<sup>2</sup> Not included with the Connector

<sup>3</sup> The model number for outdoor type is SUN-FA-XX-YY-4310-WP

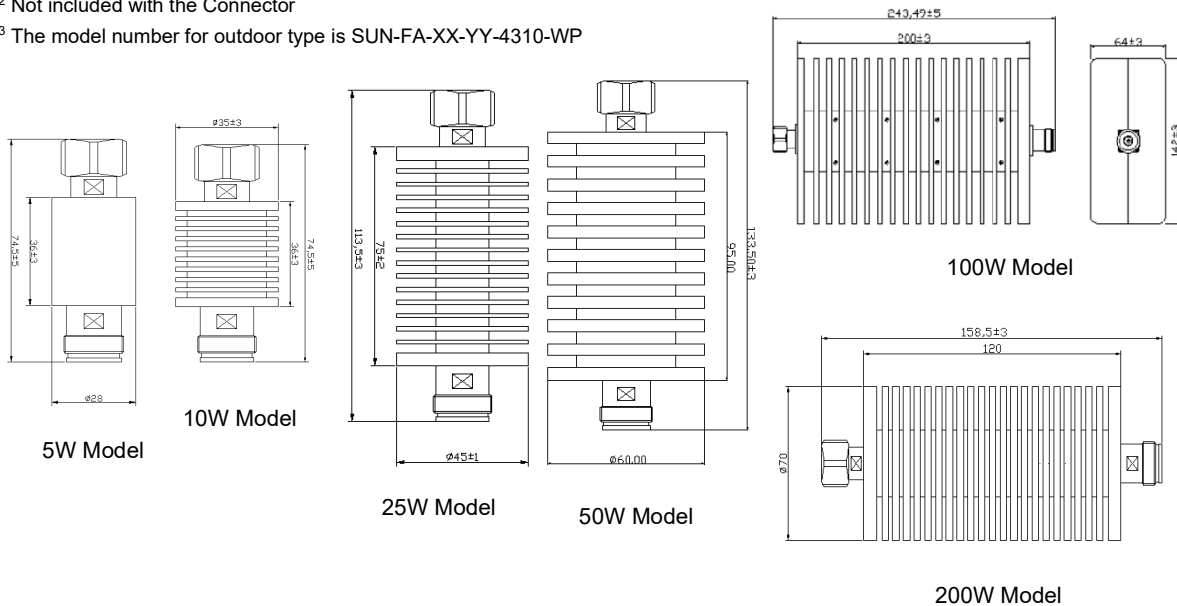

Technical data are subjected to change without notice – File: SUN-FA-XX-YY-4310 datasheet 2021V1.0