




Sunny -150dBc Low PIM Hybrid Coupler For 350-3800MHz, 200W, N(F)

Model : SUN-HC-338-200-3-NF

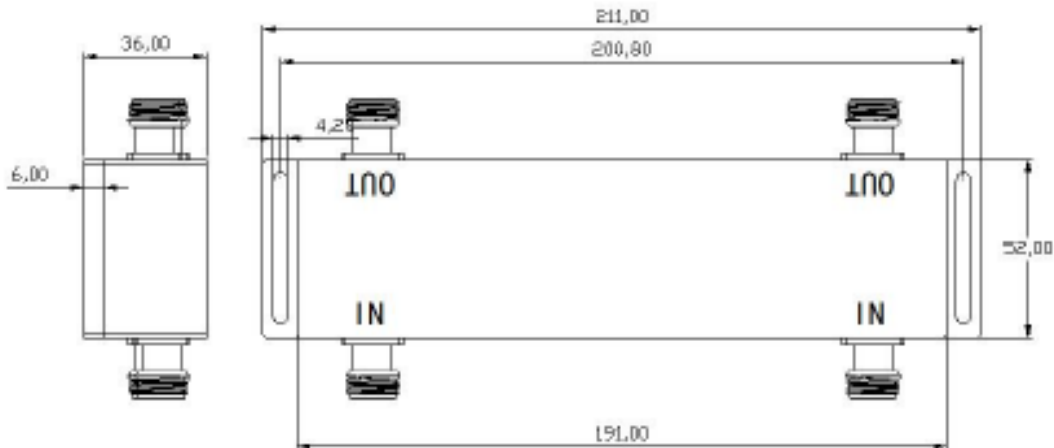

Model	SUN-HC-338-200-3-NF
Frequency Range	350-3800MHz
Insertion Loss (dB)	≤1
Coupling (dB)	3
Isolation between input ports	≥20
PIM (dBc@2x43dBm)	≤-150
Power (W)	200
VSWR	≤1.35
Impedance (Ω)	50
Temperature (°C)	-30~+65
Application	Indoor or Outdoor IP65*
RF Connector	N(F)
Size (mm)	211x52x36
Color	Black

* Outdoor Model is SUN-HC-338-200-3-NF-WP

Technical data are subjected to change without notice – File : SUN-HC-338-200-3-NF datasheet 2017V1.0