




Sunny -160dBc Low PIM Hybrid Coupler For 350-3800MHz, 300W, 4.3-10(F)

Model : SUN-HC-338-300-3-41

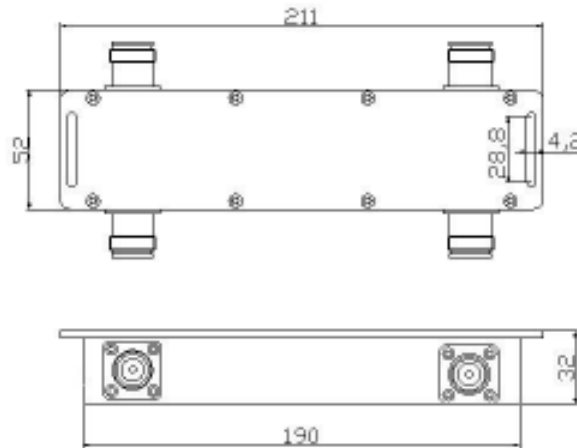

| | |
|--------------------------------------|----------------------------|
| Model | SUN-HC-338-300-3-41 |
| Frequency Range | 350-3800MHz |
| Insertion Loss (dB) | ≤1 |
| Coupling (dB) | 3 |
| Isolation between input ports | ≥20 |
| PIM (dBc@2x43dBm) | ≤-160 |
| Power (W) | 300 |
| VSWR | ≤1.35 |
| Impedance (Ω) | 50 |
| Temperature (°C) | -30~+65 |
| Application | Indoor or Outdoor IP65* |
| RF Connector | 4.3-10(F) |
| Size (mm)** | 211x52x32 |
| Color | Black |

* Outdoor model is SUN-HC-338-300-3-41-WP

** Not include connectors

Technical data are subjected to change without notice – File : SUN-HC-338-300-3-41 datasheet 2017V1.0