




Sunny -160dBc Low PIM Hybrid Coupler For 350-3800MHz, 500W, DIN(F)

Model : SUN-HC-338-500-3-DF

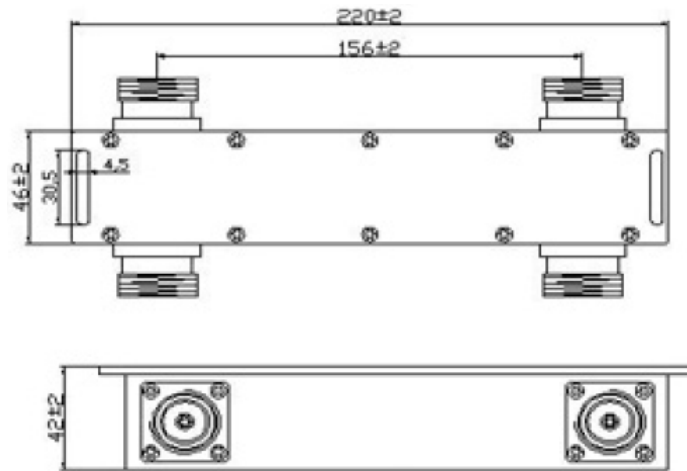

Model	SUN-HC-338-500-3-DF
Frequency Range	350-3800MHz
Insertion Loss (dB)	≤1
Coupling (dB)	3
Isolation between input ports	≥20
PIM (dBc@2x43dBm)	≤-160
Power (W)	500
VSWR	≤1.35
Impedance (Ω)	50
Temperature (°C)	-30~+65
Application	Indoor or Outdoor IP65*
RF Connector	DIN(F)
Size (mm)**	220x46x42
Color	Black

* Outdoor model is SUN-HC-338-500-3-DF-WP

** Not include connectors

Technical data are subjected to change without notice – File : SUN-HC-338-500-3-DF datasheet 2018V1.0