




Sunny -160dBc Low PIM Hybrid Coupler 698-2700MHz, 200W, 4.3-10(F), Indoor/Outdoor

Model : SUN-HC-627-200-41

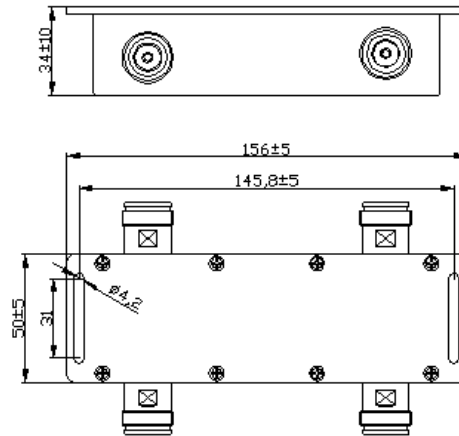

Model	SUN-HC-627-200-41
Frequency Range (MHz)	698-2700MHz
Coupling (dB)	3
Insertion Loss (dB)	≤0.65
Isolation (dB)	≥23
Power Rating (W)	200
VSWR	≤ 1.3
Impedance (Ohm)	50
3rd Order Intermodulation (dBc)@2X43dBm	≤-160
Temperature (°C)	-30 ~ 65
Humidity (%)	5 ~ 95
Environment	Indoor or Outdoor IP65
RF Connector	4.3-10(F)
Weight (kg)	0.45
Size(mm)	156x50x34
Color	Black

* Outdoor Model: SUN-HC-627-200-41-WP

Technical data are subjected to change without notice – File : SUN-HC-627-300-41 datasheet 2019V1.0