




Sunny -150dBc Low PIM Hybrid Coupler 698-2700MHz, 300W, N(F), Indoor/Outdoor

Model : SUN-HC-627-300-NF

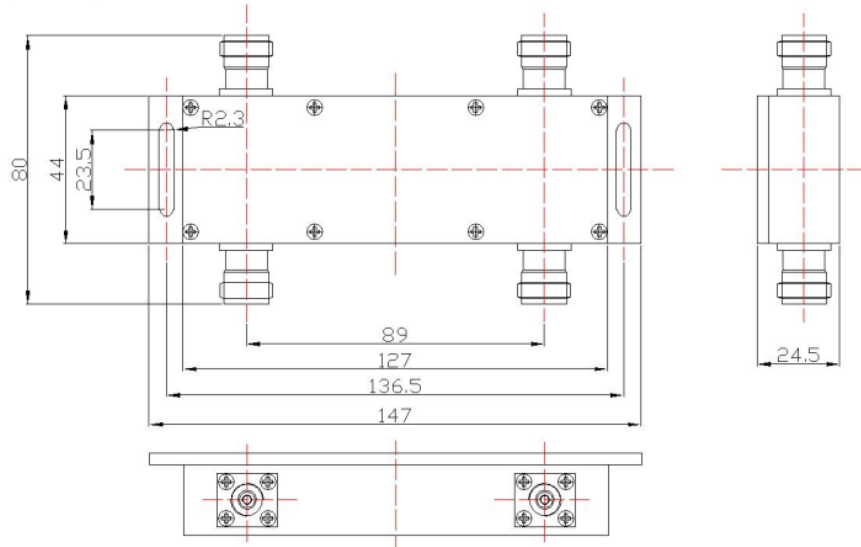

Model	SUN-HC-627-300-NF
Frequency Range (MHz)	698-2700MHz
Coupling (dB)	3
Insertion Loss (dB)	≤0.65
Isolation (dB)	≥23
Power Rating (W)	300
VSWR	≤ 1.3
Impedance (Ohm)	50
PIM (dBc@2X43dBm)	≤-150
Temperature (°C)	-30 ~ 65
Humidity (%)	5 ~ 95
Environment	Indoor or Outdoor (IP65)*
RF Connector	N(F)
Weight (kg)	0.45
Size(mm)	142X80X24.5
Color	Black

* Outdoor Model: SUN-HC-627-300-NF-WP

Technical data are subjected to change without notice – File : SUN-HC-627-300-NF datasheet 2018V1.0