




Sunny Low PIM Hybrid Coupler 698-2700MHz, 500W, DIN(F), Indoor/Outdoor

Model : SUN-HC-627-500-DF

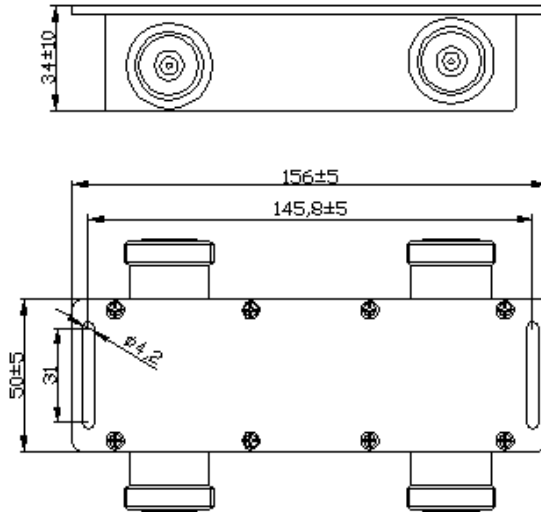

Model	SUN-HC-627-500-DF
Frequency Range (MHz)	698-2700MHz
Coupling (dB)	3
Insertion Loss (dB)	≤0.65
Isolation (dB)	≥23
Power Rating (W)	500
VSWR	≤1.3
Impedance (Ohm)	50
PIM (dBc@2X43dBm)	≤-160
Temperature (°C)	-30 ~ 65
Humidity (%)	5 ~ 95
Environment	Outdoor IP65
RF Connector	DIN(F)
Size(mm)	156x50x34
Color	Black

Technical data are subjected to change without notice – File : SUN-HC-627-500-DF datasheet 2019V1.0