



SUNNY Low PIM -155dBc Fixed Attenuator For 698-4000MHz, 50/100/200W, N(F)/4.3-10(F)/DIN(F)


Model : SUN-LFA-XXX-YY-Z-155

Where

XXX is power rating: 50/100/200W

YY is attenuation: 3-30dB

Z is RF connector: N, 4310 or DIN

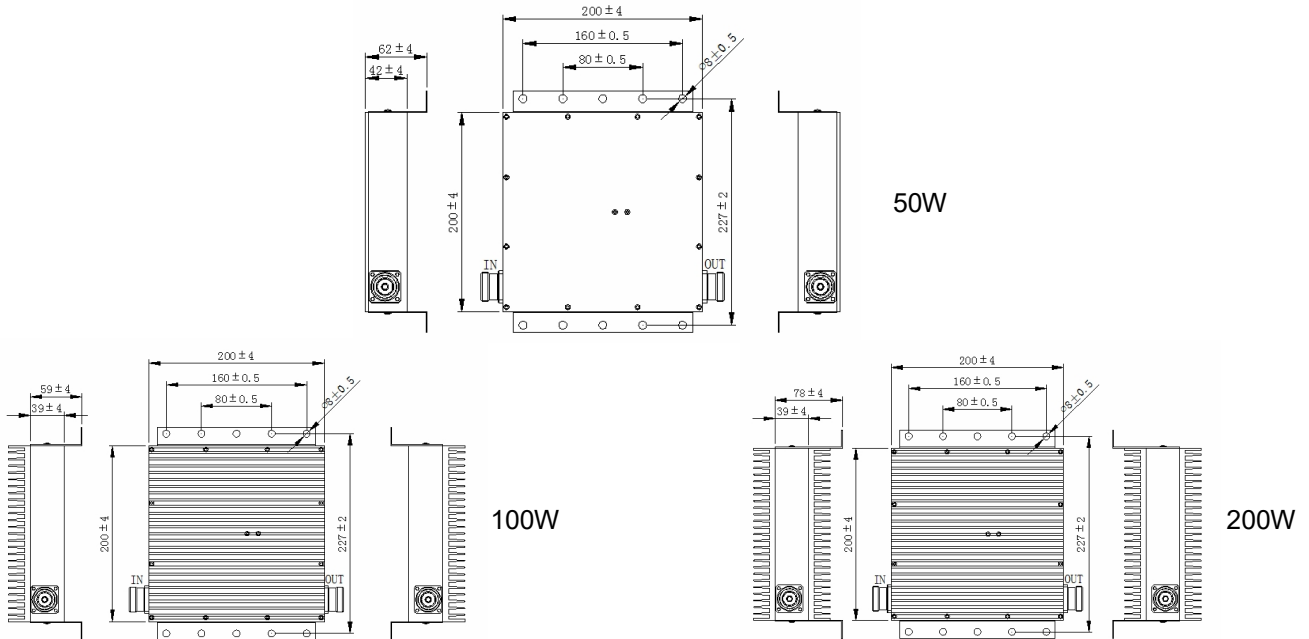

Model	SUN-LFA-XXX-YY-Z-155
Frequency Range	698-4000MHz
Attenuation (dB)	3, 5, 6, 7, 8, 10, 13, 15, 20, 30
Accuracy (dB)	±1.2@1-9dB ±1.5@10-19dB ±2@20-30dB
Power Rating (W)	50, 100 or 200
VSWR	≤ 1.25
Impedance (Ω)	50
PIM (dBc@2X43dBm)	≤-155
Environment	IP65
Temperature (°C)	-20 ~ 70
Humidity (%)	5~95
RF Connector	N(F), DIN(F) or 4.3-10(F)
Weight (kg)	TBAL
Size (mm)*	200x200x62@50W 200x200x59@100W 240x200x78@200W
Color	Black-Coated

* Not included with Connectors

Technical data are subjected to change without notice – File : SUN-LFA-XXX-YY-Z-155 datasheet 2020V1.1