




Sunny -150dBc Low PIM Power Splitter For 350-3800MHz, 200W, 2/3/4 Ways, N(F)

Model : SUN-PS-338-200-X-NF

Where

X is Number of Ways – 2, 3, 4

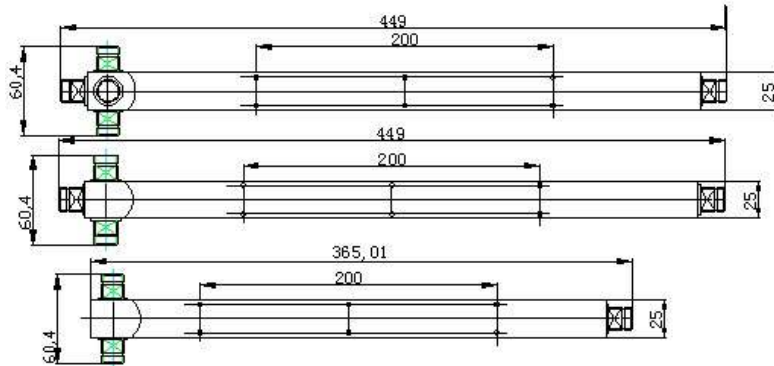

Model	SUN-PS-338-200-X-NF		
Frequency Range (MHz)	350-3800MHz		
Number Of Ways	2	3	4
Total Loss (Port to Port Loss) (dB)	≤3.5	≤5.4	≤6.7
Power Rating (W)	200		
VSWR	≤ 1.30	≤ 1.30	≤ 1.30
Impedance (Ω)	50		
IM3 (dBc@2x43dBm)	≤-160, typ. ≤-163		
Temperature (°C)	-35 ~ 65		
Application	Outdoor		
RF Connector	N(F)		
Dimension WxLxH (mm)	365x60.4x25	449x60.4x25	449x60.4x25
Weight (g)	TBAL		
Color	Black		

Technical data are subjected to change without notice – File : SUN-PS-338-200-X-NF datasheet 2021V1.0