



## Sunny 50 Ohm Dummy Load

### Model : X-50Y-Z

Where

X : Connector Type (N, DIN)


Y : Connector Interface (M, F)

Z : Power Rating (5, 10, 25, 50, 100W)

### Product Specification For Dummy Load

	5W Series	10W Series	25W Series	50W Series	100W Series
Model	N-50M-5 DIN-50M-5	DIN-50M-10 N-50M-10	DIN-50M-25 N-50M-25	DIN-50M-50 DIN-50F-50 N-50M-50 N-50F-50	DIN-50M-100 DIN-50F-100 N-50M-100 N-50F-100
Frequency Range	DC-4GHz	DC-4GHz	DC-4GHz	DC-4GHz	DC-4GHz
Impedance	50Ω	50Ω	50Ω	50Ω	50Ω
V.S.W.R.	≤1.3	≤1.2	≤1.2	≤1.2	≤1.2
PIM	-115dBc@2x33dBm	-115dBc@2x33dBm	-115dBc@2x33dBm	-115dBc@2x43dBm	-115dBc@2x43dBm
Max Power (CW Avg)	5W	10W	25W	50W	100W
Connector	N(M) or DIN(M)	DIN(M) or N(M)	DIN(M) or N(M)	DIN(M or F) N(M or F)	DIN(M or F) N(M or F)
Ambient Temperature	-55 to 80 °C				
Environment	IP67 for DIN Type	IP67	IP67	IP67	IP67
Color	Silver	Black	Black	Black	Black
Dimension (mm)*	N(M): Φ20×37.5 DIN(M): Φ34.5×41	Φ30×50	Φ48×64	Φ59×69	N(M): Φ71.5×120 DIN(M): Φ70×120

\*Not include connector

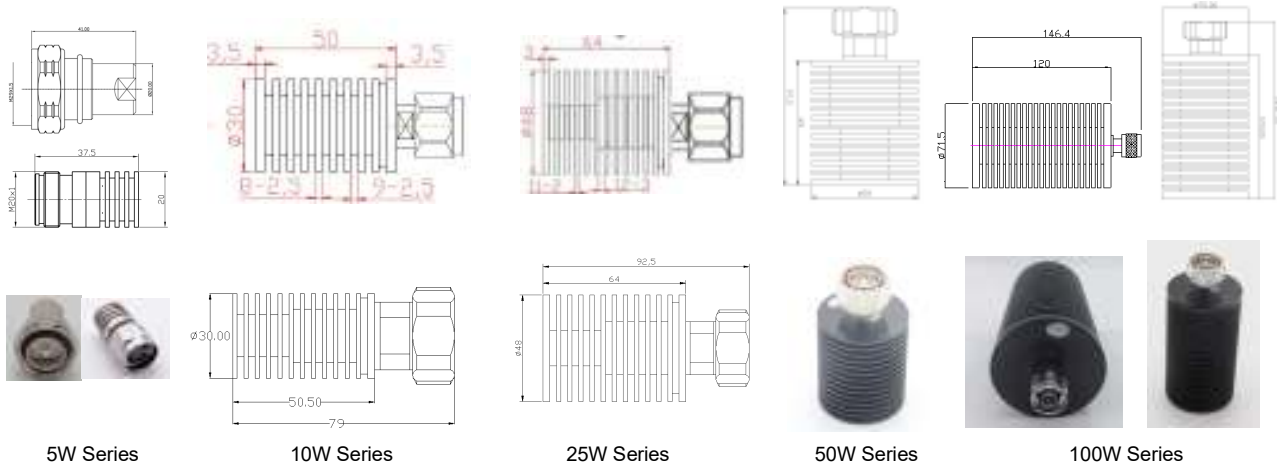

Technical data are subjected to change without notice – File : X-50Y-Z 2020V1.0