




## **Sunny -150dBc Low PIM 50 Ohm 50W Dummy Load**

**Model :DIN(M)-50-50-150**

Highlight

- Small in size, light in weight
- Low PIM, -150dBc@2x37dBm

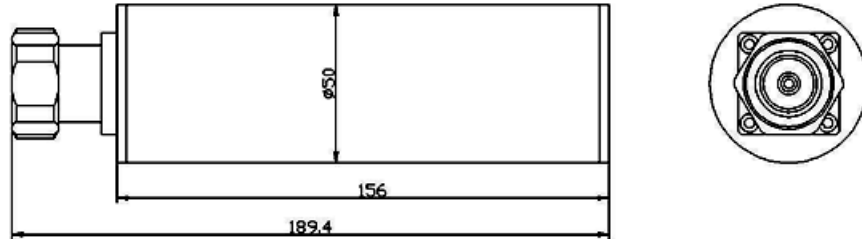

<b>Model</b>	DIN(M)-50-50-150
<b>Frequency Range</b>	698-2700MHz
<b>Impedance (<math>\Omega</math>)</b>	50
<b>VSWR</b>	$\leq 1.25$
<b>Average Power (W)</b>	50
<b>IM3 (dBc)</b>	$\leq -150@2x40dBm$
<b>Connector</b>	DIN(M)
<b>Ambient Temperature (<math>^{\circ}C</math>)</b>	-30 ~ +65
<b>Environment</b>	Indoor
<b>Color</b>	Black
<b>Dimension (mm)</b>	156x $\varnothing$ 50*

\*Not included connector

Technical data are subjected to change without notice – File : DIN(M)-50-50-150 2018V1.0