



PRODUCT DATA SHEET


Coaxial Cable Connector: N-J1/2S

Description

N(M) Connector For 1/2" Superflex

Suitable standard

IEC 60169-14

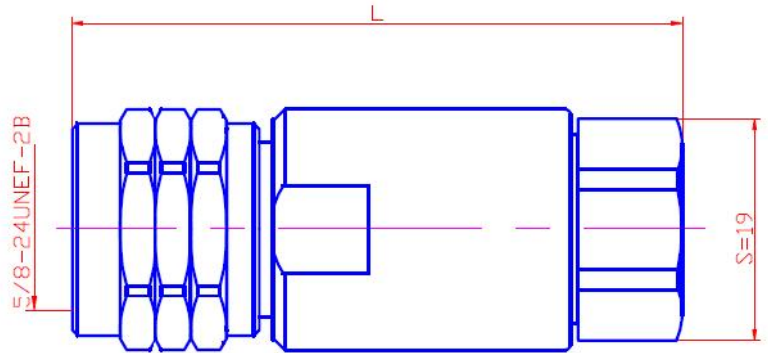

MATERIALS & PLATING

	Description	Material	Surface Plating	Remark
1	Shell/Body	BRASS	Nickel or Tri Alloy	
2	Centre Conductor	BRASS	Gold or Silver	
3	Insulator	PTFE		
4	Coupling nut	BRASS	Nickel or Tri Alloy	

ELECTRICAL CHARACTERISTICS

	Item	Technical Data
1	Impedance	50Ω
2	Frequency range max	DC-3GHz
3	Dielectric Withstanding Voltage	2500V (RMS), 50MHz, at sea level
4	Contact Resistance	Center conductor ≤ 1mΩ, Outer conductor ≤ 0.25mΩ
5	Insulation Resistance	≥ 5000MΩ
6	VSWR	DC~3GHz ≤ 1.1

MECHANICAL CHARACTERISTICS

1	Durability	≥ 500 cycles
---	------------	--------------

ENVIRONMENTAL CHARACTERISTICS

1	Temperature range	Cable: - 40°C to +85 °C
---	-------------------	-------------------------