




DIRECTIONAL COUPLER FOR 350-1000MHz

Model : SUN-DC-310-200-YY-N(F)

Where YY is 6, 10 or 15dB

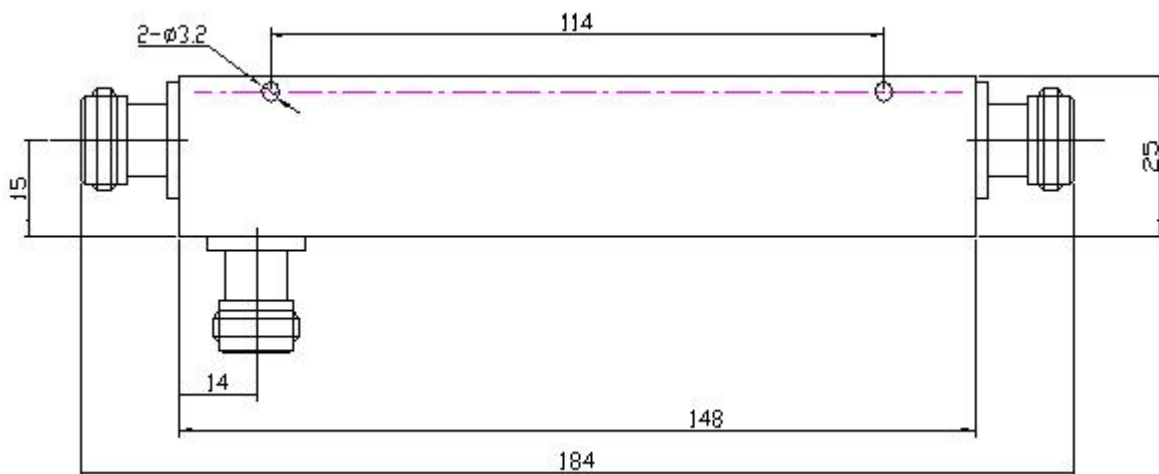

Model	SUN-DC-310-200-YY-N(F)					
Frequency Range (MHz)	350-1000					
Coupling (dB)	5±0.6dB	6±0.6dB	7±0.6dB	10±0.8dB	15±0.8dB	20±1.0dB
Insertion Loss (dB)	1.95dB	1.70dB	1.25dB	0.8 dB	0.45dB	0.35 dB
Directivity (dB)	≥20					
Power Rating (W)	200					
VSWR	≤1.2					
Impedance (Ohm)	50					
Temperature (deg)	-40~+85					
RF Connector	N(F)					
Weight (g)	200					
Size (mm)	148x25x18					
Color	Black					

* Not include with connectors

Technical data are subjected to change without notice – File: SUN-DC-310-200-YY-N(F) datasheet 2016V1.0