




SUNNY -150dBc Low PIM Directional Coupler For TETRA400 / CDMA800 / GSM900&1800 / UMTS / WLAN / LTE, 350-3800MHz, 300W, 6-30dB, N(F)

Model: SUN-DC-338-300-YY-NF

Where YY is 6, 7, 10,15, 20 or 30dB

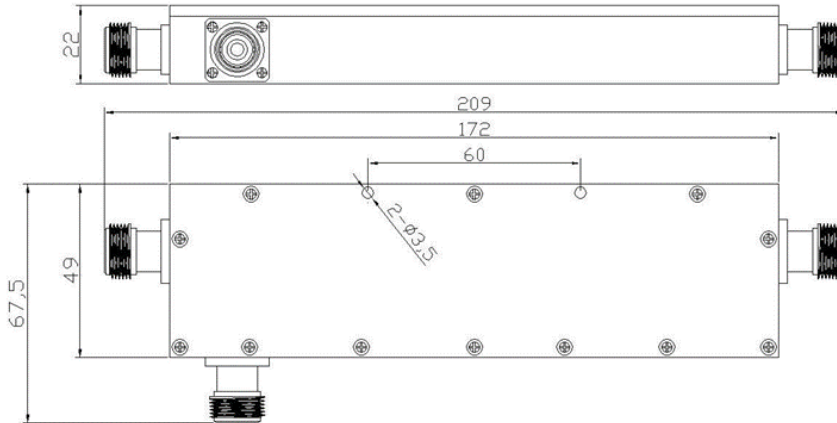

Model	SUN-DC-338-300-YY-NF					
Frequency	350-3800MHz					
Coupling (dB)	6±1.2	7±1.2	10±1.5	15±1.5	20±2.0	30±2.5
Insertion Loss (dB)	≤2.1	≤1.9	≤1.5	≤1.2	≤0.8	≤0.6
Isolation (dB)	≥22	≥23	≥26	≥30	≥35	≥43
VSWR	≤1.35					
PIM (dBc@2x43dBm)	≤-150					
Power Capacity (W)	300					
RF Connector	N(F)					
Impedance (Ω)	50					
Color	Grey					
Temperature (°C)	-30~+65					
Application	Indoor or Outdoor IP65*					
Dimension WxLxH** (mm)	49x172x22					
Weight(kg)	TBAL					

* Outdoor model is SUN-DC-338-300-YY-NF-WP

** not included connectors

Technical data are subjected to change without notice – File : SUN-DC-338-300-YY-NF datasheet 2017V1.0