




Sunny Wide Band Low PIM Hybrid Coupler, 340-2700MHz, 200W, N(F), -150dBc

Model : SUN-HC-327-200-3-NF

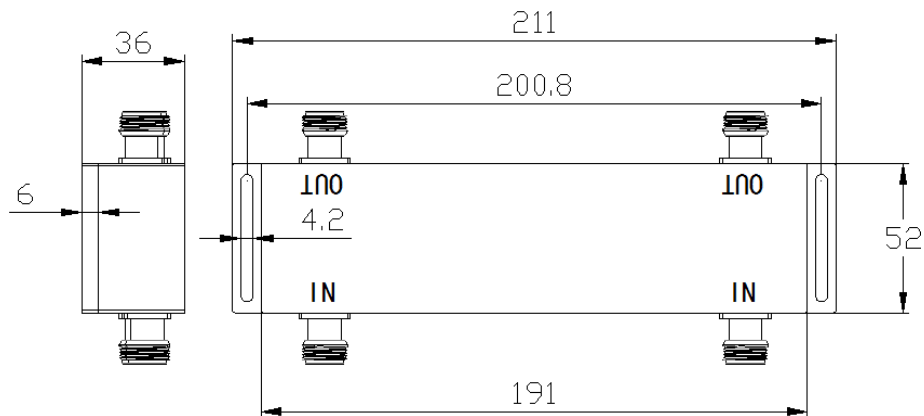

Model	SUN-HC-327-200-3-NF
Frequency Range (MHz)	340-2700
Insertion Loss (dB)	≤4.0
Isolation between input ports (dB)	≥20
Average Power (W)	200
VSWR	≤1.3
Impedance (Ω)	50
3rd order Intermodulation (dBc@2x43dBm)	≤-150
Temperature (°C)	-35~+70
Relative Humidity (%)	5~95
Environment	IP60 (IP65 for outdoor type)**
RF Connector	N(F)
Dimension (mm)	211x52x36*
Color	Black

*Not included connectors

** Outdoor model is SUN-HC-327-200-3-NF-WP

Technical data are subjected to change without notice – File : SUN-HC-327-200-3-NF datasheet 2017V1.0