



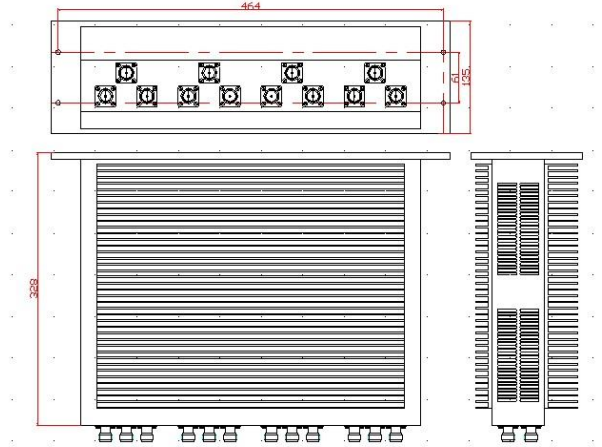

Sunny AM(TX) POI For SM

Model : SUN-POI-AM(TX)-8S(I)-4S(O)-SM

A) Block Diagram

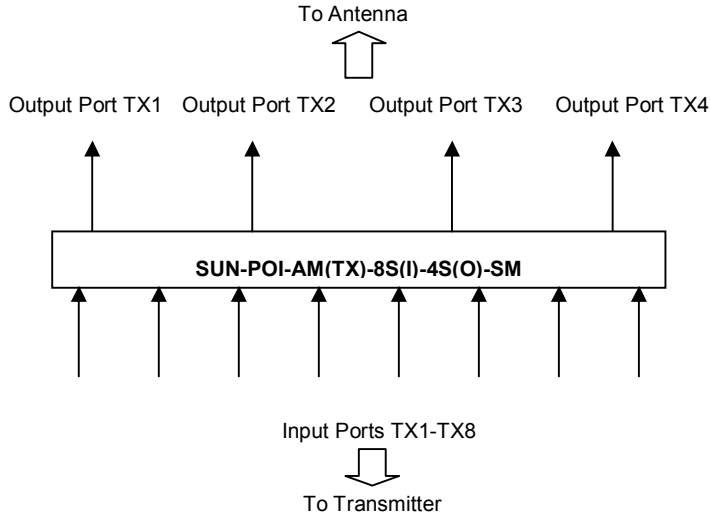

B. Technical Specification

Model	SUN-POI-AM(TX)-8S(I)-4S(O)-SM
Input Port Frequency Per Port	
TX1	567KHz
TX2	621KHz
TX3	675KHz
TX4	783KHz
TX5	810KHz
TX6	864KHz
TX7	1044KHz
TX8	TBA
Bandwidth Per Port	8KHz
Input Power Per Port	50W
Insertion Loss To Either Output	17dB max.
Return Loss	
All Inputs Ports	15dB min.
Output Ports TX1-TX4	15dB min.
Input Isolation	
All Input Ports	20dB min.
Connectors	N(F) For All Ports
Impedance	50Ω
Operating Temperature	-10 to 70°C
Material	Casing – Steel With Zinc Coating (Black Color) Front Plate – Aluminium (Silver Color)
Mounting	Rack Mount
Dimensions (DxWxH)	3U
Weight	15kg



Remarks: 1. 1U Fans & thermostat for cabinet with full ON is required, reference model: TOTEN 1U Fan unit SA2904.0400
2. ALL used or un-used ports must connect a 50Ω devices such as Dummy Load

Technical data are subjected to change without notice – File : SUN-POI-AM(TX)-8S(I)-4S(O)-SM datasheet 2016V1.0