




-155dBc Low IM3, Indoor, Wide Band Power Splitter For 340-2700MHz, 300W, N(F)

Model : SUN-PS-327-300-X-NF

Where

X is Number of Ways – 2,3,4

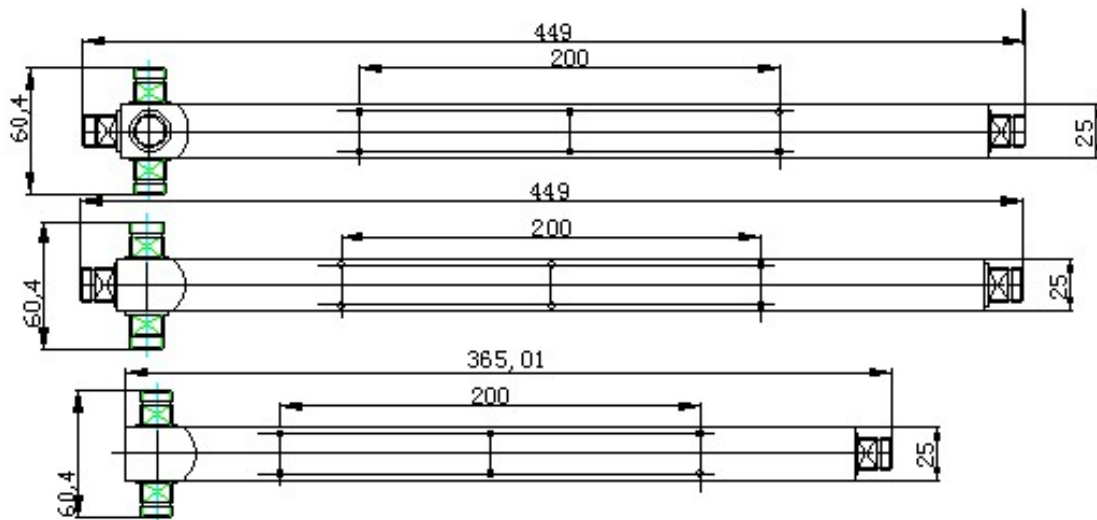

Model	SUN-PS-327-300-X-NF		
Frequency Range (MHz)	340-2700MHz		
Number Of Ways	2	3	4
Total Loss (Port to Port Loss)*	≤3.2	≤5.4	≤6.5
Average Power (W)	300		
VSWR	≤ 1.3		
Impedance (Ohm)	50		
3rd Order Intermodulation (dBc@2x43dBm)	≤-155		
Temperature (°C)	-35 ~ 60		
Humidity (%)	5 ~ 95		
Environment	IP60		
RF Connector	N(F)		
Size (mm)*	365x60.4x25	449x60.4x25	449x60.4x42.7
Color	Black		

* Not included connectors

Technical data are subjected to change without notice – File : SUN-PS-327-300-X-NF 2019V1.0