




-160dBc Low IM3, Outdoor, Power Splitter For 350-2700MHz, 500W, DIN(F)

Model : SUN-PS-327-500-X-DF-160

Where

X is Number of Ways – 2,3,4

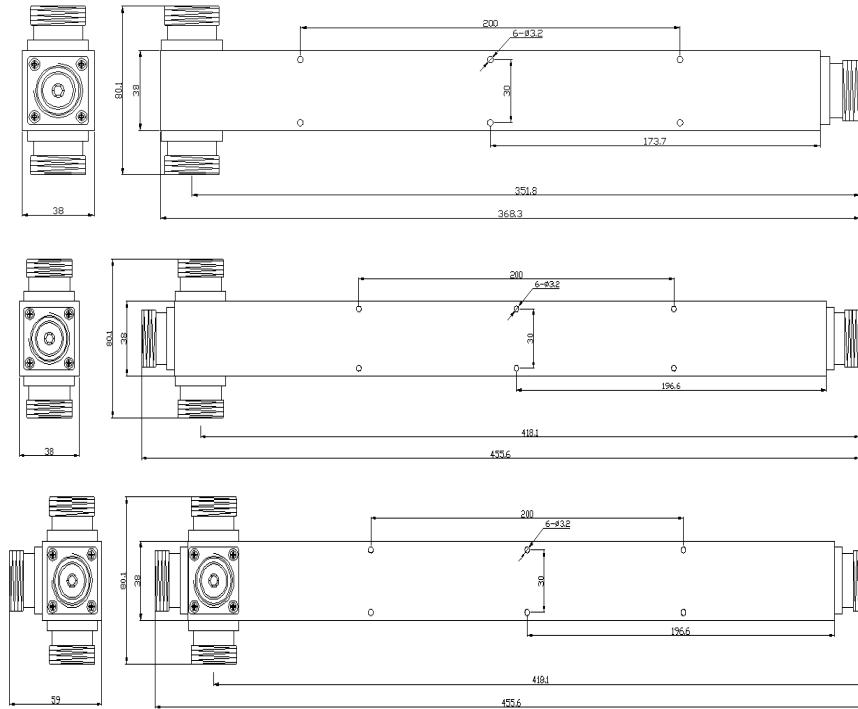

Model	SUN-PS-327-500-X-DF-160		
Frequency Range (MHz)	350-2700MHz		
Number Of Ways	2	3	4
Total Loss (Port to Port Loss)*	≤3.4	≤5.4	≤6.6
Power Rating (W)	500		
VSWR	≤ 1.3	≤ 1.3	≤ 1.4
Impedance (Ω)	50		
IM3 (dBc)	≤-160@2x43dBm		
Temperature (°C)	-35 ~ 75		
Humidity (%)	5 ~ 95		
Water Proof	IP67		
RF Connector	DIN(F)		
Size (mm)	368.3x80.1x38	455.6x80.1x38	455.6x80.1x59
Housing Material	Aluminum		
Color	Black		

Technical data are subjected to change without notice – File : SUN-PS-327-500-X-DF-160 2017V1.0