




Sunny -160dBc Low PIM Power Splitter 698-2700MHz, 200W, 4.3-10(F), Outdoor

Model : SUN-PS-627-200-X-41

Where

X is Number of Ways – 2, 3, 4

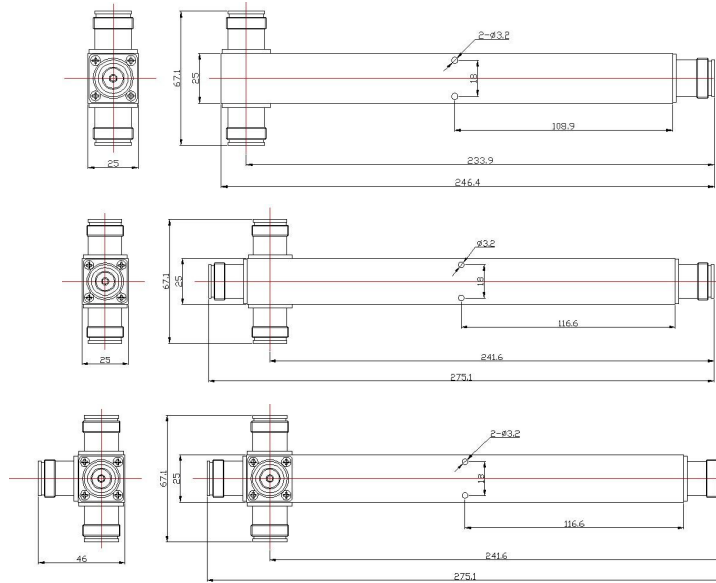

Model	SUN-PS-627-200-X-41		
Frequency Range (MHz)	698-2700MHz		
Number Of Ways	2	3	4
Total Loss (Port to Port Loss)*	≤3.3	≤5.2	≤6.4
Power Rating (W)	200		
VSWR	≤ 1.3		
Impedance (Ohm)	50		
PIM (dBc@2X43dBm)	≤-160		
Temperature (°C)	-35 ~ 60		
Humidity (%)	5 ~ 95		
Environment	Outdoor IP65		
RF Connector	4.3-10(F)		
Size (mm)	246.4x67.1x25	275.1x67.1x25	275.1x67.1x46
Color	Black		

*Total loss is Split Loss + Insertion Loss

Technical data are subjected to change without notice – File : SUN-PS-627-200-X-41 2017V1.0